

ANTI EXPLOSION / CORROSION CAMERA



CDR-1206


Features

- Built-in 1/3" Sony Super HAD CCD
- Vari-focal lens, easy to fit to a wide range of requirements and conditions.
- Stainless steel made housing, Anti-Corrosion and Anti-explosion Capability
- Designed as Vandalproof and waterproof structure, delicate design, elegant appearance, widely used in high-end 24-7 surveillance like hotels, supermarkets, etc.
- Can also be applied on oil fields, sea surveillance, etc.
- Match with wall bracket.

Specifications

MODEL	CDR-1206
Signal System	PAL/NTSC
Image Sensor	1/3" SONY CCD
NO. of Effective Pixels	PAL: 752(H)X582(V); NTSC: 768(H)X494(V)
Horizontal Resolution	480 TV Lines
Minimum Illumination	0.5 LUX/F1.2(day); 0Lux(IR on)
Si/N Ratio	52dB(AGC off)
Average Life	20000hrs
View Angle	40-87°
Lens	3.5-8 mm vari-focal lens
Working Distance	98'
Electronic Shutter	PAL: 1/50-1/100,000
IR LED	18 PCS LED; 850nm
Video Output	Composite Video Output(1Vp-p 75ΩTerminated)
Power Supply	DC 12V
Vandalproof criterion	IP65
Body	Chrome
Weight	TBD

Dimensions

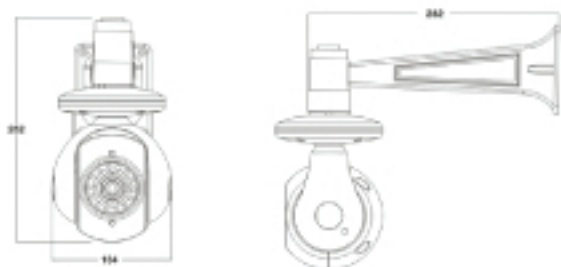

SVA Group USA Inc.
1316 John Reed Court, City of Industry, CA 91745
Tel: 626-363-9500 | Fax: 626-363-9508
1-888-8-ASK-SVA
<http://www.sva-usa.com>